

INSTRUCTION SHEET

Yamaha Plate Assembly Replacement

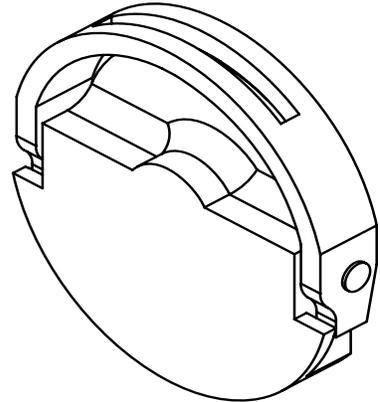
(Please read and understand instructions before beginning installation)

Tools Required:

- 2 Flat head screwdrivers
- 8mm open end wrench
- 2mm hex key

Parts Required:

- Yamaha Plate Assembly (Fig1)
- (Sunrise Part Number 133107)

Fig. 1**Removal**

- 1) Using a flat head screw driver remove the c-clip securing the Xtender Plastic Cover. The c-clip can be removed by locating the flat spot in the cover and inserting the flat blade of the screw driver into the space between the flat spot and the c-clip and gently prying it out. Once the c-clip is removed lift the cover off over the Plate Assembly.



- 2) Use a 2mm Hex key to loosen the set screw securing the Plate Assembly to the axle.



3) Hold the flat spots on the axle with an 8mm Wrench, while turning the Plate Assembly counter clockwise. This will remove the Plate Assembly from the axle.

4) Reverse the above procedure to install the new Plate Assembly..



Fig. 3